


**Features**

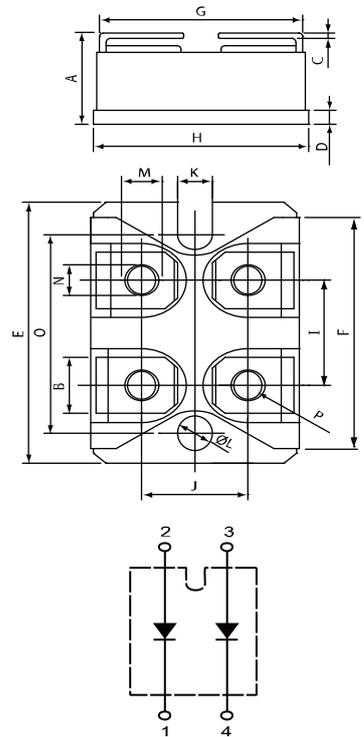

**Maximum Ratings**

∴  
∴

**Electrical Characteristics @ 25 °C Unless Otherwise Specified.**

			°C
			°C
			°C
			°C

DIM	DIMENSIONS			
	INCHES		MM	
	MIN	MXA	MIN	MXA
A	.500	.519	12.	13.20
B	.307	.322		8.20
C	.029	.033		.84
D	.077	.082		2.10
E	1.487	1.502		38.20
F	1.250	1.258		32.00
G	.931	.956		24.30
H	.996	1.007		25.60
I	.586	.594		15.10
J	.492	.516	.50	13.10
K	.161	.169	4.10	4.30
L	.161	.169	4.10	4.30
M	.181	.191	4.60	4.95
N	.165	.177	4.20	4.50
O	1.184	1.192	30.70	30.30
P	M4*8			

\* Pulse Test: Pulse Width 300 μ sec, Duty < 2%

Figure .1- Typical Forward Characteristics

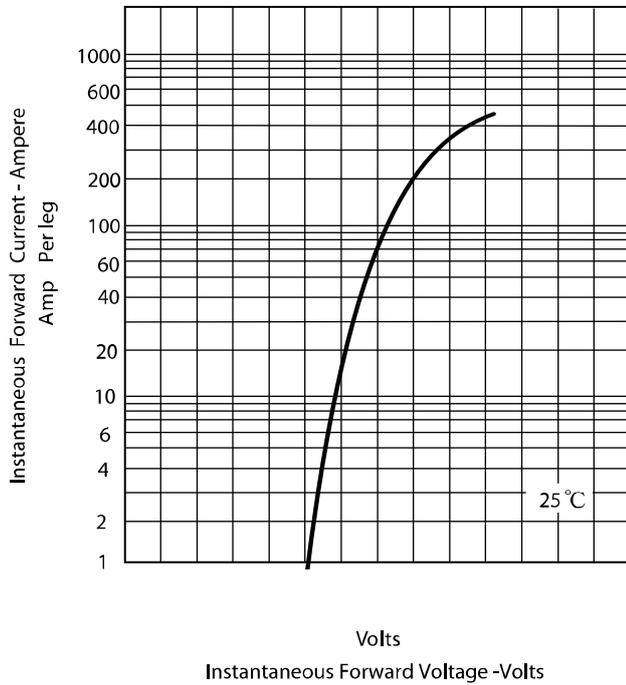


Figure.2 - Forward Derating Curve

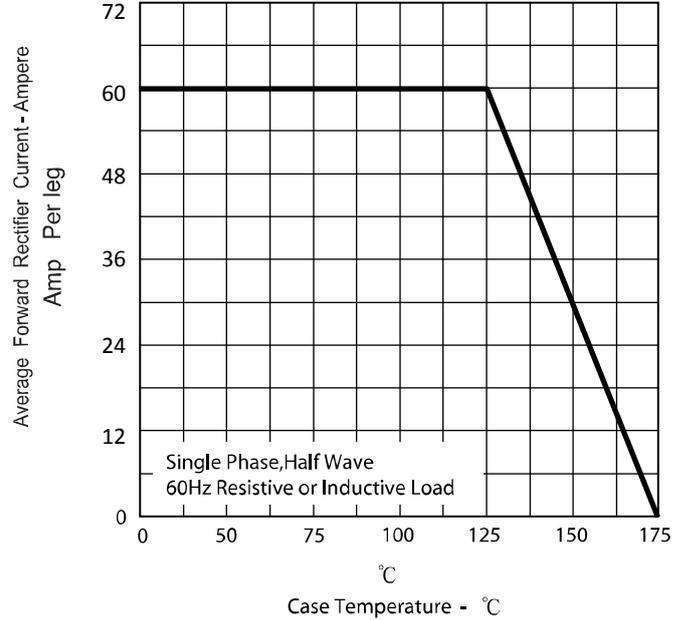


Figure.3 - Peak Forward Surge Current


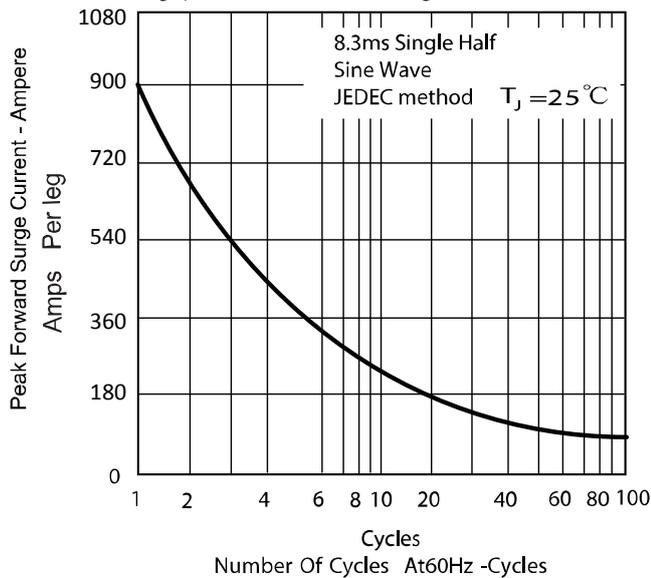


Figure .4 - Typical Reverse Characteristics

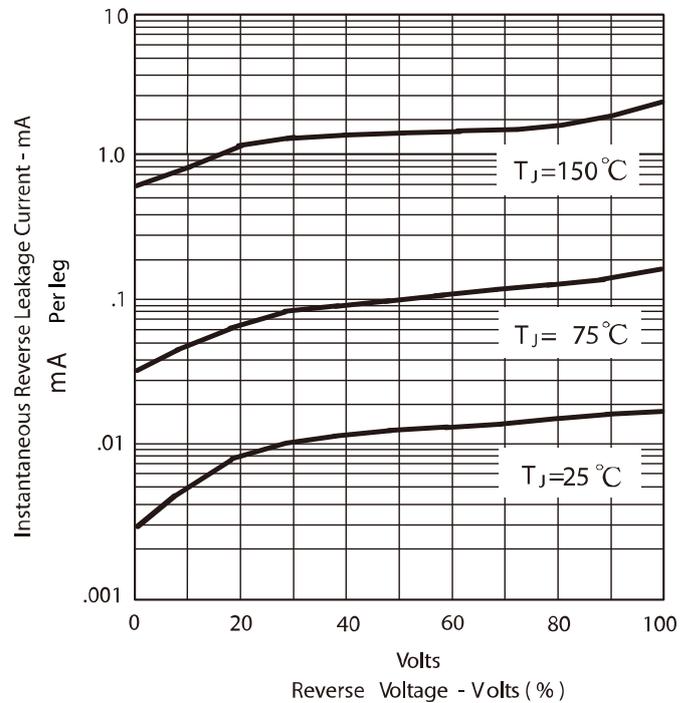

**Revision History**

Date	Revision	Notes
8/10/2014	1.0	Initial release
01/03/2020	1.1	Applied company name change