


Type 400V V_{RRM}
 Iso at on Type Pac a
 E ectr ca y Iso at on

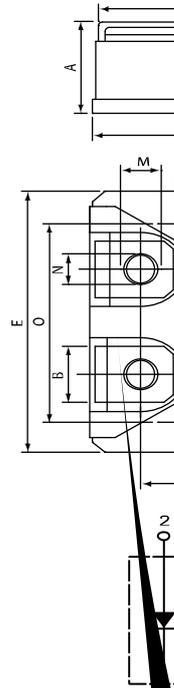

DIM	DIMENSIONS	
	MIN	INCHES
	.500	
	.307	
	.029	
	.077	
	1.487	
	1.250	
	.931	
	.996	
	.586	
	.492	
	.161	
	.161	
	.181	
	.165	
	1.184	

Pulse Test: Pulse Width 300 μ sec, Duty < 2%

Figure.1 - Typical Forward Characteristics

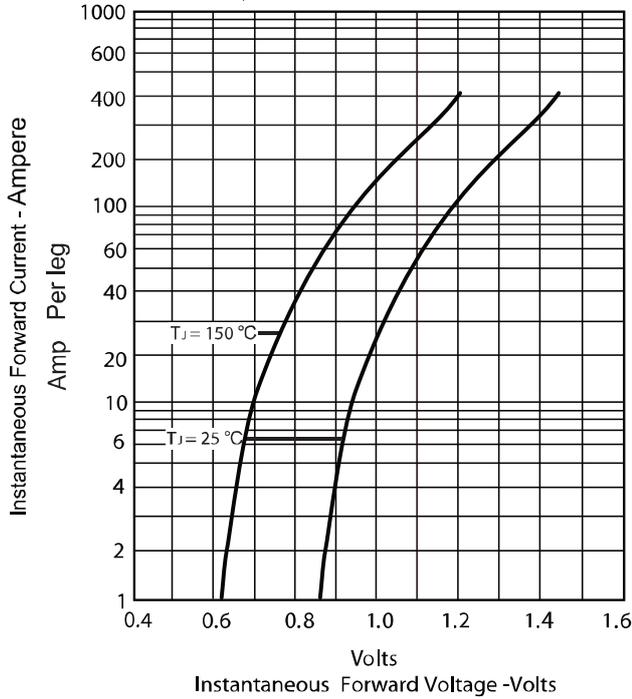


Figure.2 - Forward Derating Curve



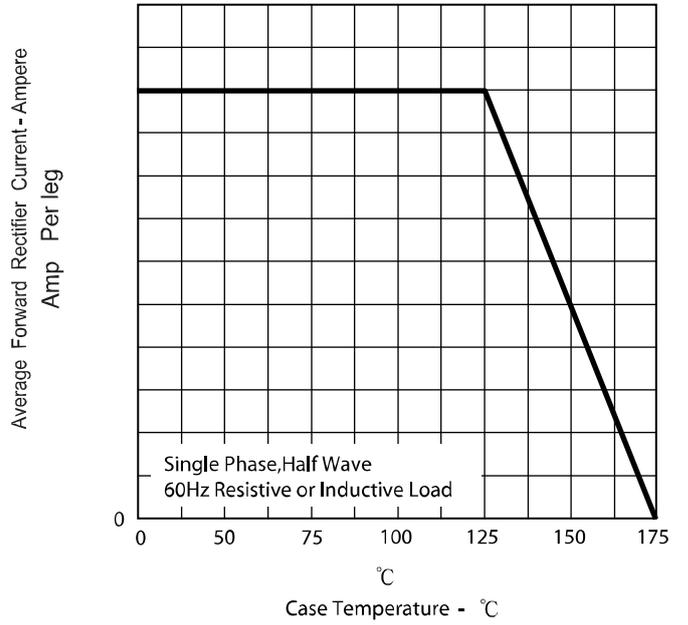


Figure .4 -Typical Reverse Characteristics

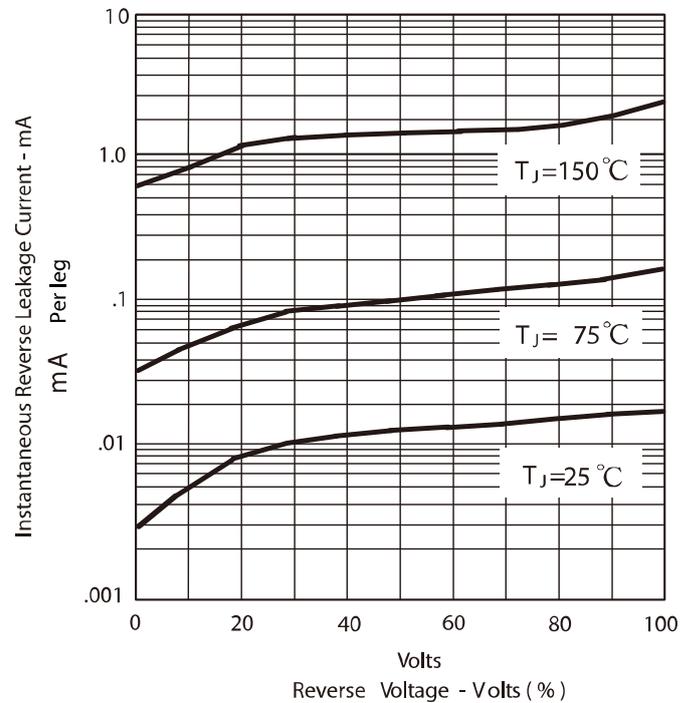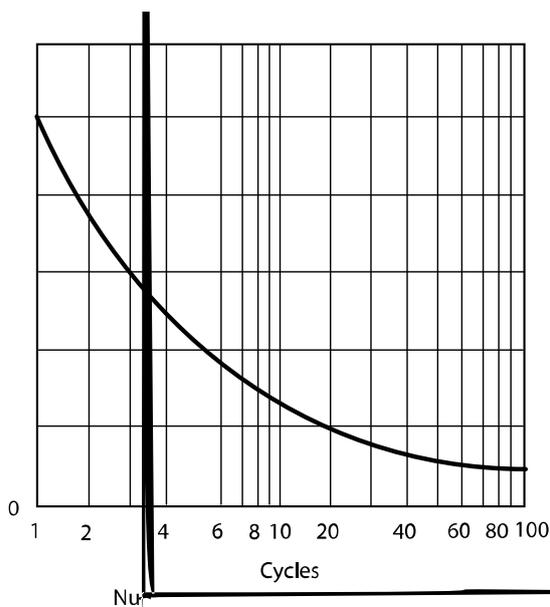

Revision History

Date	Revision	Notes
8/10/2014	1.0	Initial release
9/20/20216	1.1	Update the forward voltage drop data
01/03/2020	1.2	Applied company name change